

## Ultra-Miniature Automotive PCB Relay **G8NW-2**

- Compact Size
- High Performance PCB Relay
- Fully Automated Assembly
- Fully Sealed Construction
- Separate SPDT Contacts



### Available Types

Type	Description
G8NW-2	Standard Type
G8NW-2S	High Sensitivity (Low Pull-in Voltage)
G8NW-2L	High Temperature (105°C)
G8NW-2H	High Temperature / High Sensitivity
G8NW-2F	Flasher Load Switching (0.7mm min. Contact Gap)
G8NW-2U	Ultra-High Sensitivity
G8NW-27LR	Reflow Solder Type (Vented, Higher Stand-off) High Temperature
G8NW-27HR	Reflow Solder Type (Vented, Higher Stand-off) High Temperature / High Sensitivity
G8NW-27UR	Reflow Solder Type (Vented, Higher Stand-off) Ultra-High Sensitivity

\*Certain relay types may be combined (Contact Omron for availability.)

### Contact Data

Max. Switching Current	30 A
Max. Switching Voltage	16 V
Max. Carry Current	25 A (at 20°C for 1 hour)
Min. Carry Current	100 mA
Contact Material	Silver Tin Alloy – Cadmium Free (PdRu for -F type)

### Coil Ratings (at 20°C)

Type	Rated Voltage	Coil Resistance (± 10%)	Nominal Power Consumption	Pull in Voltage	Dropout Voltage
G8NW-2	12VDC	225 Ω	640 mW	< 7.2 V	>1.0 V
G8NW-2S	12VDC	180 Ω	800 mW	< 6.5 V	>1.0 V
G8NW-2L	12VDC	225 Ω	640 mW	< 7.2 V	>1.0 V
G8NW-2H	12VDC	180 Ω	800 mW	< 6.5 V	>1.0 V
G8NW-2F	12VDC	130 Ω	1108 mW	< 7.2 V	>1.0 V
G8NW-2U	12VDC	130 Ω	1108 mW	< 5.5 V	>1.0 V
G8NW-27LR	12VDC	225 Ω	640 mW	< 7.2 V	>1.0 V
G8NW-27HR	12VDC	180 Ω	800 mW	< 6.5 V	>1.0 V
G8NW-27UR	12VDC	130 Ω	1108 mW	< 5.5 V	>1.0 V

## Typical Applications

Power Windows / Power Door Lock
Smart Junction Box and Module Applications
Seat Adjustment
Sunroof

## Characteristics

Max. Initial Contact Voltage Drop / Resistance		50 mV / 50 mΩ (@ 1A, 12VDC) 100 mV / 100 mΩ (@ 1A, 12VDC) (for -F type)
Operate Time		10 ms max. (2.5 ms typical) @ 12 VDC
Release Time		10 ms max. (1.2 ms typical)*
Bounce Time	Operate	5 ms max. (0.5 ms typical)
	Release	10 ms max. (4.0 ms typical)
Switching Frequency	Mechanical	18,000 operations per hour
	Electrical	1,800 operations per hour (under rated loading)
Insulation Resistance		100 MΩ min. (at 500 VDC)
Dielectric Strength		1 mA max. leakage at 500 VAC, 50 – 60 Hz for 1 minute between coil and contacts and between contacts
Vibration	Mechanical durability	10 – 500 Hz, 44.1m/s <sup>2</sup>
	Malfunction durability	10 – 500 Hz, 44.1m/s <sup>2</sup>
Shock	Mechanical durability	1000 m/s <sup>2</sup>
	Malfunction durability	100 m/s <sup>2</sup> min.
Ambient Operating Temperature		-40°C to 85°C (105°C max. for -L and -H types)
Humidity		35% to 85% RH
Service Life	Mechanical	1,000,000 operations
	Electrical	100,000 operations (load dependent)
Weight		8.0 g (approx.)


\* External coil suppression will cause a measurable increase in release times and may cause the relay's characteristics to fall out of the specifications given here.

## Characteristic Reference Data







### Durability Test Data

Relay	Load Type	Current	Cycles Tested
G8N/ G8NW/ G8ND	Power window motor (locked)	26 A	200,000
	Door lock motor	27 A 8A Steady state	130,000


Example: Resistance of 225Ω coil  
 = 75% of 225Ω at -40°C, or 169Ω  
 = 100% of 225Ω at 20°C, or 225Ω  
 = 125% of 225Ω at 85°C, or 281Ω

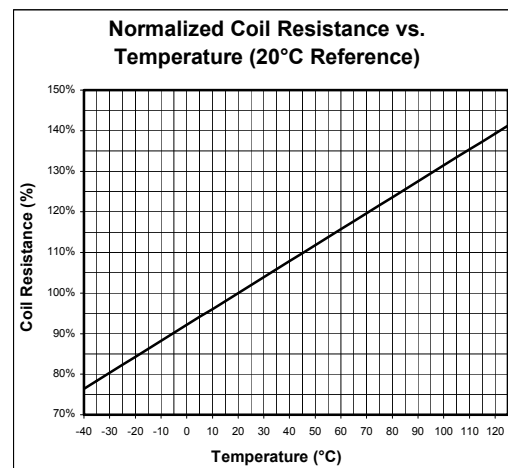

# Characteristic Reference Data (Continued)

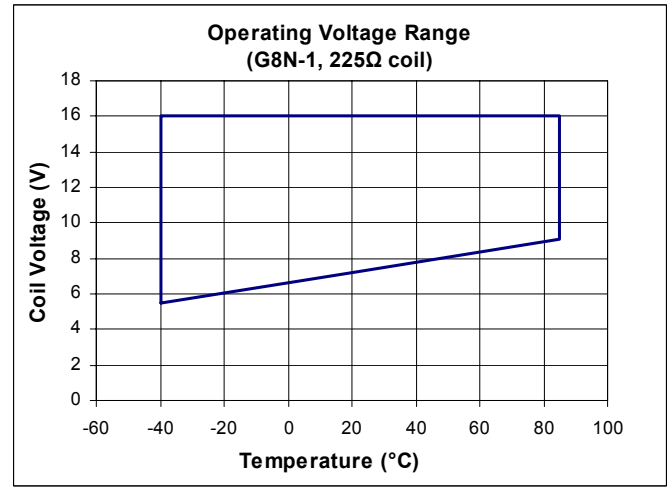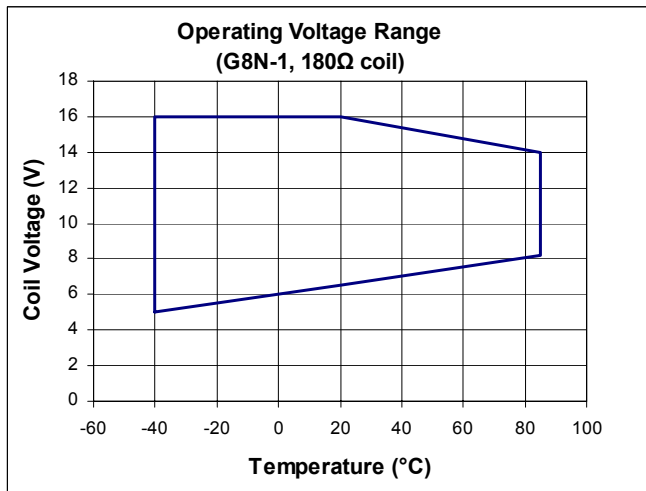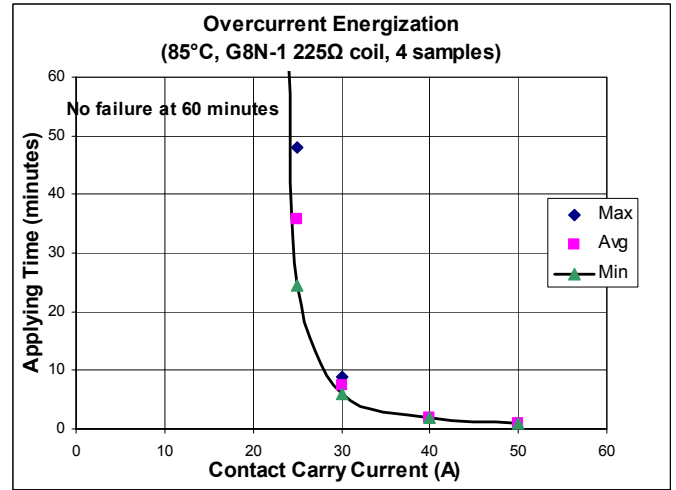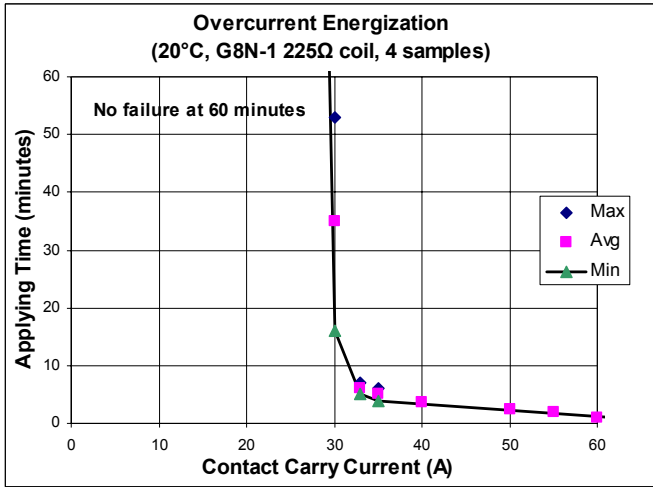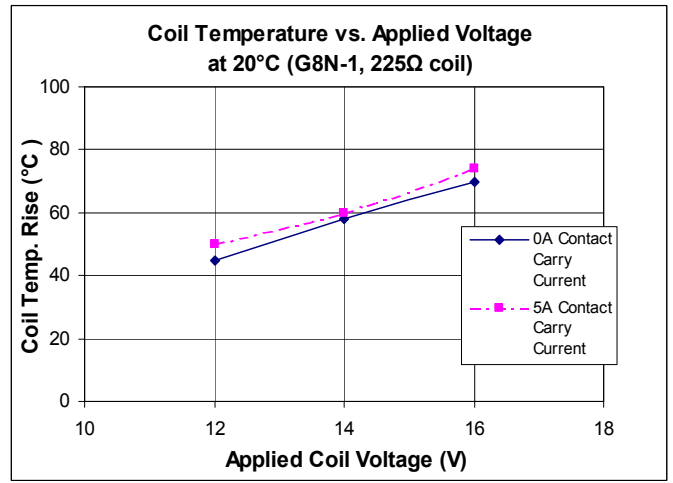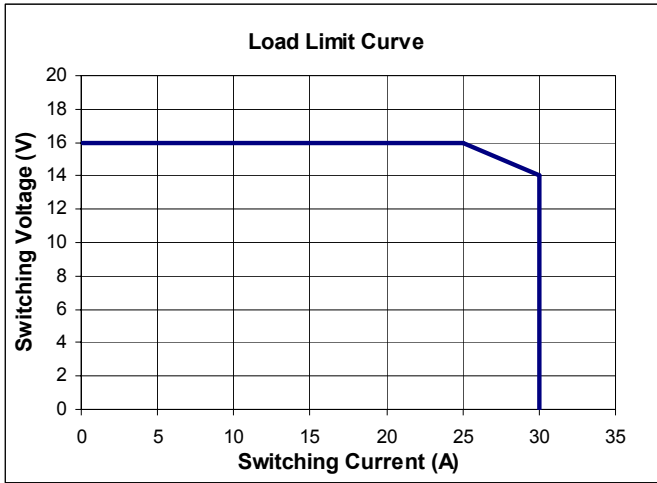


## Dimensions

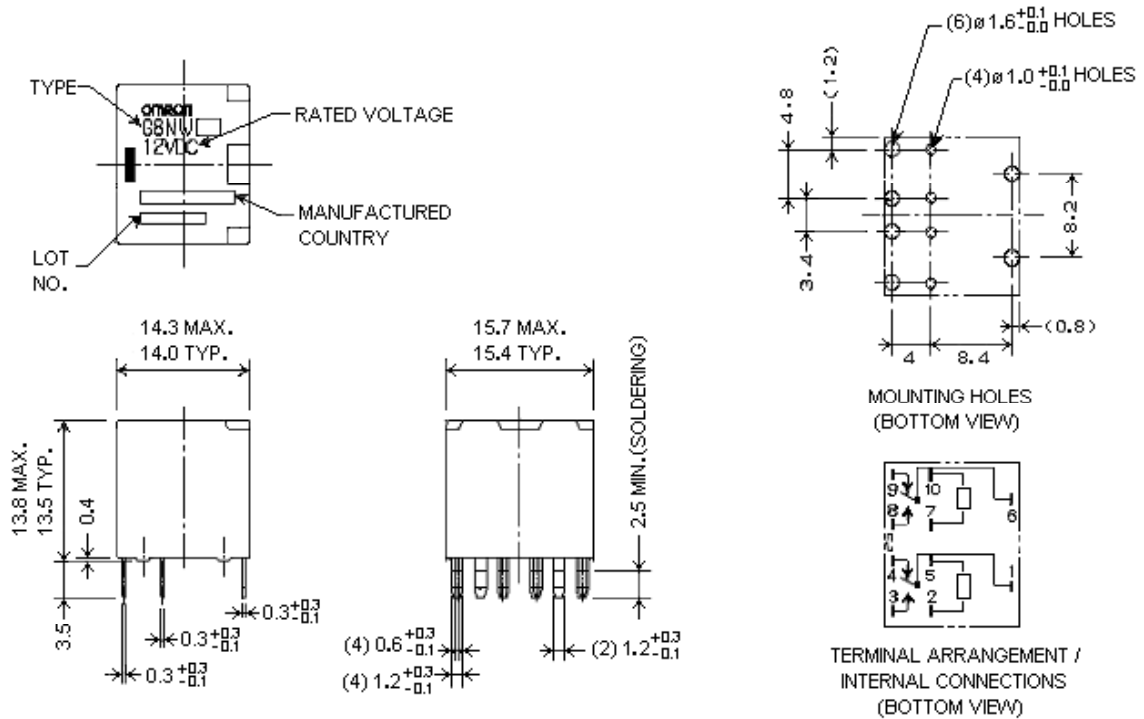

\*\*Note: G8NW-27□R type has 0.7mm (not 0.4mm) standoffs for pin in paste process, to make the effective terminal length  $3.2+0.3$ mm (not  $3.5+0.3$ mm), and the height from the bottom of the standoffs to the top of the case 14.1mm MAX, 13.8mm TYP.

## Tube Packaging

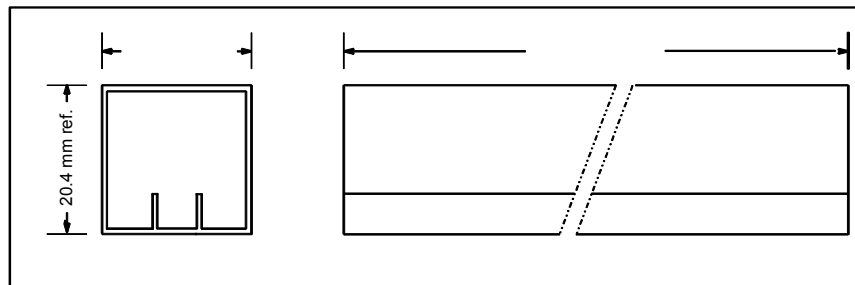

36 relays per tube, 30 tubes per box (1080 relays per box)