

TRAFFIC/RAILWAY LAMPS

Low Voltage Incandescent Lamps

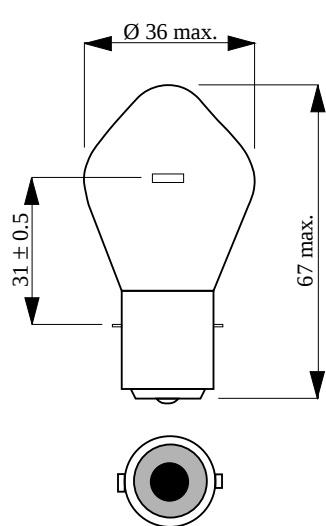


Fig. 11-06

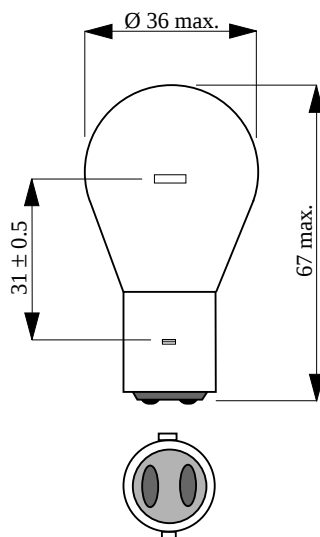


Fig. 11-07

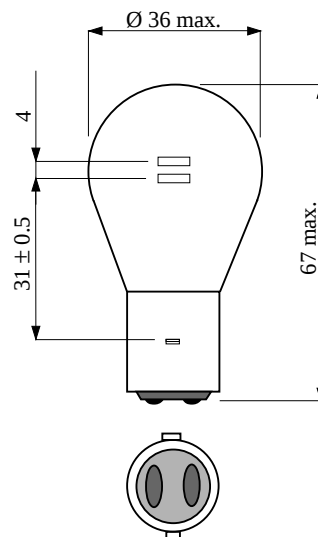


Fig. 11-08

Article	Volt	Watt	Lumen	LcL	Base	2% Failure	Osram	Philips	Fig.
423840020	10	20	270	31	Ba20s	6000	SIG1227	13585	11-06
423840030	10	30	400	31	Ba20s	6000	SIG1238	13586	11-06
423840045	10	45	600	31	Ba20s	6000		13587	11-06
423842020	10	20/20	270/270	31	Ba20d	6000		13590	11-08
423843030	10	30/30	400/400	31	Ba20d	6000		13591	11-08
424840025	40	25	250	31	Ba20d	4400	SIG1455	13575	11-07
424840040	40	40	500	31	Ba20d	4400	SIG1462	13576	11-07
424840060	40	60	800	31	Ba20d	4400	SIG1470	13577	11-07
424842525	40	25/25	225/250	31	Ba20d	4400	SIG1456	13570	11-08
424844040	40	40/40	450/500	31	Ba20d	4400	SIG1463	13571	11-08
424846060	40	60/60	750/800	31	Ba20d	4400	SIG1471	13572	11-08