


NAIS

1 Form A Slim Power Relay

LD-RELAYS



mm inch

FEATURES

- 1. Slim type: Width 7 mm .276 inch.**
20.3(L)x7.0(W)x15.0(H) mm
.799(L)x.276(W)x.591(H) inch
- 2. Perfect for small load switching of home appliances**
10⁵ switching operations possible with a 3A 250V AC resistive load.
- 3. Low operating power**
Compact size, nominal operating power as low as 200mW.

- 4. High shock resistance**
The relay withstands a functional shock resistance of 300m/s² [approx. 30 G more]
- 5. High insulation resistance**
 - Creepage distance and clearances between contact and coil: Min. 6 mm .236 inch (In compliance with IEC65)
 - Surge withstand voltage between contact and coil: 10,000 V or more.
- 6. UL/CSA, VDE, TÜV approved.**

SPECIFICATIONS

Contact

Arrangement	1 Form A		
Initial contact resistance, max. (By voltage drop 6 V DC 1 A)	Max. 100 mOhm		
Contact material	Silver alloy		
Rating (resistive load)	Nominal switching capacity	3 A 277 V AC, 3 A 30V DC	
	Max. switching power	831 V A (AC), 90W (DC)	
	Max. switching voltage	277 V AC, 30 V DC	
	Max. switching current	3 A	
Expected life (min.operations)	Mechanical (at 180 cpm)	5x10 ⁶	
	Electrical (at 20 cpm) (at rated load)	3A 125V AC, 3A 30V DC	2x10 ⁵
		3A 250V AC	10 ⁵

Coil

Nominal operating power	200 mW
-------------------------	--------

Remarks

- * Specifications will vary with foreign standards certification ratings.
- *¹ Measurement at same location as "Initial breakdown voltage" section.
- *² Detection current: 10mA
- *³ Wave is standard shock voltage of ±1.2x50µs according to JEC-212-1981
- *⁴ Excluding contact bounce time.
- *⁵ Half-wave pulse of sine wave: 11 ms; detection time: 10 µs
- *⁶ Half-wave pulse of sine wave: 6 ms
- *⁷ Detection time: 10 µs
- *⁸ Refer to 5. Conditions for operation, transport and storage mentioned in AMBIENT ENVIRONMENT (Page 61).

Characteristics

Max. operating speed	20 cpm (at rated load)	
Initial insulation resistance* ¹	Min. 1,000 MOhm (at 500 V DC)	
Initial* ² breakdown voltage	Between open contacts	750 Vrms for 1 min.
	Between contact and coil	4,000 Vrms for 1 min.
Initial surge voltage between contact and coil* ³	Min. 10,000 V	
Operate time* ⁴ (at nominal voltage)	Max. 10ms (at 20°C 68°F)	
Release time (with diode)* ⁴ (at nominal voltage)	Max. 10ms (at 20°C 68°F)	
Temperature rise (at 70°C)	Max. 45°C with nominal coil voltage and at 3 A contact carrying current (resistance method)	
Shock resistance	Functional* ⁵	Min. 300 m/s ² {approx. 30 G}
	Destructive* ⁶	Min. 1,000 m/s ² {approx. 100 G}
Vibration resistance	Functional* ⁷	10 to 55Hz at double amplitude of 1.5mm
	Destructive	10 to 55Hz at double amplitude of 1.5mm
Conditions for operation, transport and storage* ⁸ (Not freezing and condensing at low temperature)	Ambient temp.	-40°C to +70°C -40°F to +158°F
	Humidity	5 to 85% R.H.
Unit weight	Approx. 4 g .141 oz	

TYPICAL APPLICATIONS

- Air conditioner
- Refrigerator
- Hot water units
- Microwave ovens
- Fan heaters

ORDERING INFORMATION

Ex. A LD 1 12

Product name	Contact arrangement	Coil voltage(V DC)
LD	1: 1 Form A	4H: 4.5, 09: 9, 24: 24 05: 5, 12: 12 06: 6, 18: 18


UL/CSA, TÜV approved type is standard.
Note: Standard packing: Carton: 50pcs, Case: 1,000pcs

TYPES AND COIL DATA (at 20°C 68°F)


Part No.	Nominal voltage, V DC	Pick-up voltage, V DC (max.) (Initial)	Drop-out voltage, V DC (min.) (Initial)	Coil resistance, Ohm (±10%)	Nominal operating current, mA (±10%)	Nominal operating power, mW	Maximum allowable voltage, V DC (at 20°C 68°F)
ALD14H	4.5	3.38	0.22	101	44.4	200	5.8
ALD105	5	3.75	0.25	125	40.0	200	6.5
ALD106	6	4.5	0.3	180	33.3	200	7.8
ALD109	9	6.75	0.45	405	22.2	200	11.7
ALD112	12	9	0.6	720	16.7	200	15.6
ALD118	18	13.5	0.9	1,620	11.1	200	23.4
ALD124	24	18	1.2	2,880	8.3	200	31.2

DIMENSIONS

mm inch

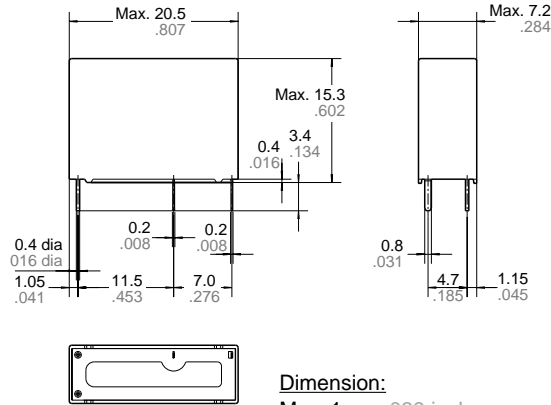


PC board pattern (Bottom view)

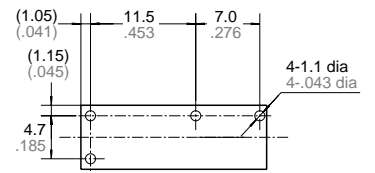

Tolerance: ±0.1±.004

Schematic (Bottom view)



Dimension:


Max. 1mm .039 inch:
1 to 3mm .039 to .118 inch:
Min. 3mm .118 inch:

General tolerance


±0.1 ±.004
±0.2 ±.008
±0.3 ±.012

REFERENCE DATA

1. Max. switching power

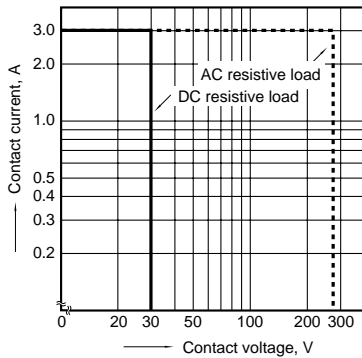


2. Life curve

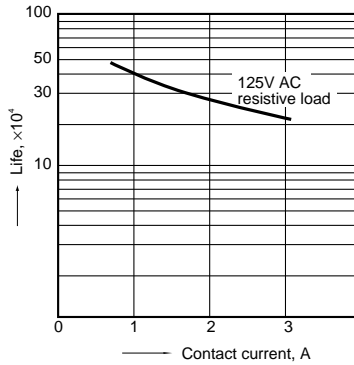


3. Coil temperature rise

Sample: ALD112, 6 pcs.
Point measured: inside the coil
Contact current: 0 A, 3 A

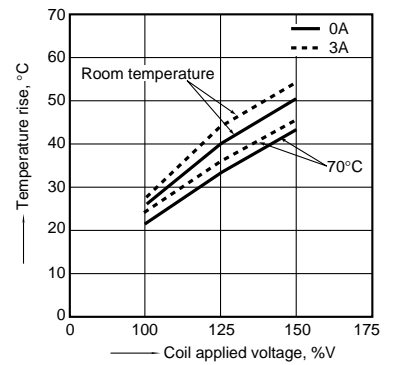


4-(1). Operate time

Sample: ALD112, 6 pcs.

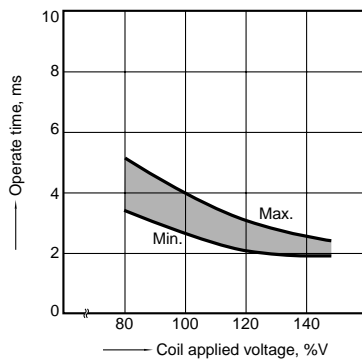


4-(2). Release time (without diode)

Sample: ALD112, 6 pcs.

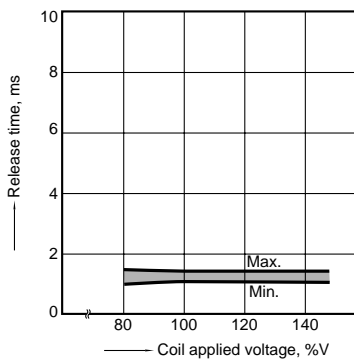


4-(3). Release time


Sample: ALD112, 6 pcs.

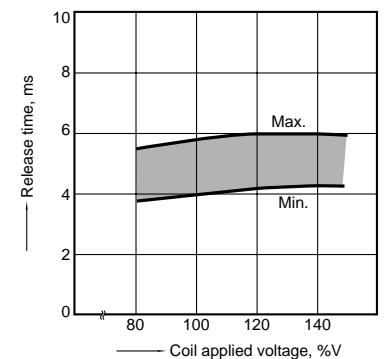


5-(1). Electrical life test
 (3 A 250 V AC, resistive load)
 Sample: ALD112, 6 pcs.
 Operating speed: 20 cpm
 Ambient temperature: room temperature
 circuit:

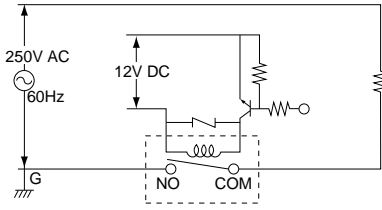


Change of pick-up and drop-out voltage

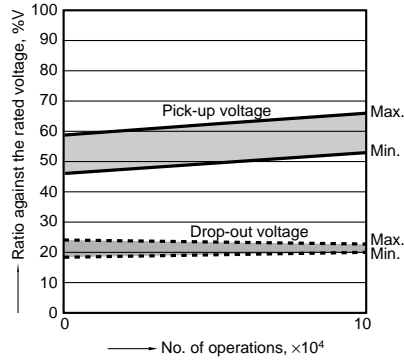


Change of contact resistance

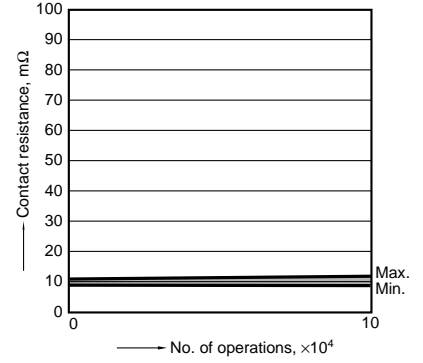

5-(2). Electrical life test
 (3 A 30 V DC, resistive load)
 Sample: ALD112, 6 pcs.
 Operating speed: 20 cpm
 Ambient temperature: room temperature
 circuit:

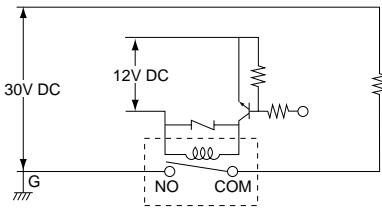

Change of pick-up and drop-out voltage

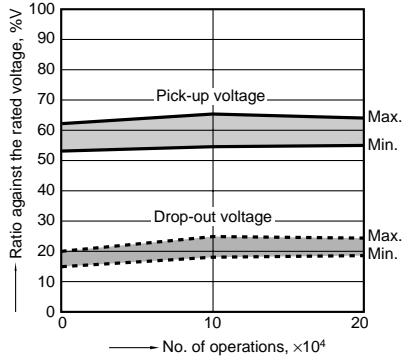

Change of contact resistance

